MegaLine® Connect45 Pro Wall outlets 50 x 50

flush mount for Keystone jacks

50 x 50 / 3-fold / with cover



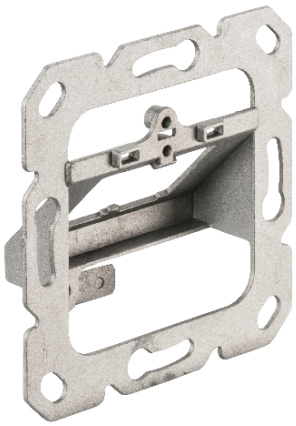


Illustration similar

Description

Wall outlets for fitting with MegaLine® Connect45 Pro modules in Keystone design.

Properties / applications

Central plate with integrated dust protection covers and lable field with tag incl. cover plate. Connection of potential equilization via lug possible. Designable layout - central plate and cover frame can be replaced by almost all frames and inserts available on the market.

For flush-mounted and wall duct mounting of MegaLine® Connect45 Pro jack modules.

Constructive characteristics

Jack type	MegaLine® Connect45 Pro keystone jacks
Dust protection	Integrated dust cover.
Grounding connection type	Flat plug 6.3 mm

Construction

Material (housing)	Die-cast zinc
Material (front panel)	Plastic
Front colour	Similar to pure white RAL 9010

Electrical characteristics

Temperature range	-40 °C - +70 °C

Connections

Mating face	without
Conductor cross-section (AWG)	-

Dimensions

Width	80 mm
Height	80 mm
Depth	30 mm
Angle of inclination	45.0 °

Labelling

Labelling	marking field

Forwarding to third parties only with the approval of KERPEN DATACOM GmbH
We reserve the right to make technical modifications; typographical errors and mistakes excepted.

MegaLine® Connect45 Pro Wall outlets 50 x 50

flush mount for Keystone jacks

50 x 50 / 3-fold / with cover

Standards, certificates and approvals

Degree of protection (IP)	IP20
Chemical continuance	Conform to RoHS and REACH, Free of hazardous substances acc. to RoHS 2011/65/EU

Compatibility

KDA1H00A1000001 - Surface mounted Connect100 / 80 x 80 / Pure white 40 mm

MegaLine® Housing Surface mounted 40 mm KDA4M5KR1100024 - Jack module Keystone format Category 6_A

MegaLine® Connect45 Pro Jack module Category 6_A

Scope of supply

Central plate with integrated dust protection flaps, including cover frame

Capacity (max.)	Ports	PU (pieces)	Part number
3	3	1	KDA4A0KU3400001

Forwarding to third parties only with the approval of KERPEN DATACOM GmbH
We reserve the right to make technical modifications; typographical errors and mistakes excepted.